

2080 E-Max™ Automatic Thermal Server Coffee Brewer

(with Hot Water Faucet)

2086 E-Max Automatic Thermal Server Coffee Brewer

(with Hot Water Faucet)

2082 E-Max Automatic Airpot Coffee Brewer

(with Hot Water Faucet)

2088 E-Max Automatic Airpot Coffee Brewer

(with Hot Water Faucet)

The Bloomfield E-Max™, a better way to brew exceptional coffee. Efficient, reliable and easy to use. The E-Max gives you complete brewing control. Using patented technology, the E-max maintains temperatures to within 1°F, delivering great-tasting coffee cup after cup. With just the keypad and LCD display, you can program any setting, including specific brew cycles, volume, temperature and on-off times. Monitoring is just as easy. The E-Max can display brew count, water volume, the current time and date, even fault detection messages. The Bloomfield E-Max, it's an effortless way to brew extraordinary coffee.

Features

- **Custom on-screen programming and electronic controls** using the LCD and external keypad allow precise programming of temperature, volume and timing without removing panels.
- **Programmable pre-infusion and water pulsation** provide even more custom control of the extraction process.
- **Key brewer statistics** such as water volume, brew count, diagnostic messaging and brew time countdowns can be monitored through the LCD display.
- **Up to four brew settings** can be independently programmed to easily accommodate demand fluctuations and brewing variables.
- Additional timer feature allows **programmable startup and shutdown** for additional energy and operations saving.
- **Self-diagnostics** with fault detection messages on display help trouble shoot system for service.
- A high level of **commonality of parts** with E-Max and E-Max LX brewers will significantly reduce the inventory of spare parts required to service many body styles.



Model 2080/2086
shown with optional 7750

Model 2082/2088
shown with optional 7759

- **Keypad lock** deactivates keypad, protecting the brew settings and commands when used in a self-service application.
- **Battery back-up** is an integral part of the control and protects clock and program settings in case of power failure.
- **Precise brewing temperature** is established and maintained throughout the brew cycle for full flavored coffee every time and faster brewer recovery.
- **After Hours Mode™** will automatically reduce water temperature when not in use, saving energy and increasing component life.
- **Countdown Quality Timer™** will signal the end of approved coffee holding time.
- **Brew Cycle Timer** eliminates the risk of double brewing during brew cycle.
- **Liquid level sensor and brew valve** perform consistently with low or fluctuating water pressures.
- **Larger capacity tank** assures consistent water temperature for brewing as well as a plentiful supply of hot water from the independent front-mounted hot water faucet.
- **Independent front-mounted hot water faucet** allows drawing of hot water without affecting coffee taste or brewing cycle.
- **Rugged base** assures stability and strength and provides easy placement of airpot or thermal server.

BLOOMFIELD


MODELS

2080, 2086, 2082, 2088



MODELS	DIMENSION 'A'		DIMENSION 'B'		DIMENSION 'C'	
	INCHES	(MM)	INCHES	(MM)	INCHES	(MM)
2080(CA)/2086(EX)	27 1/2	(699)	18 1/16	(459)	22 11/16	(576)
2082(CA)/2088(EX)	23 1/2	(599)	13 7/8	(352)	18 7/16	(468)

DIMENSIONS: INCH
(MM)

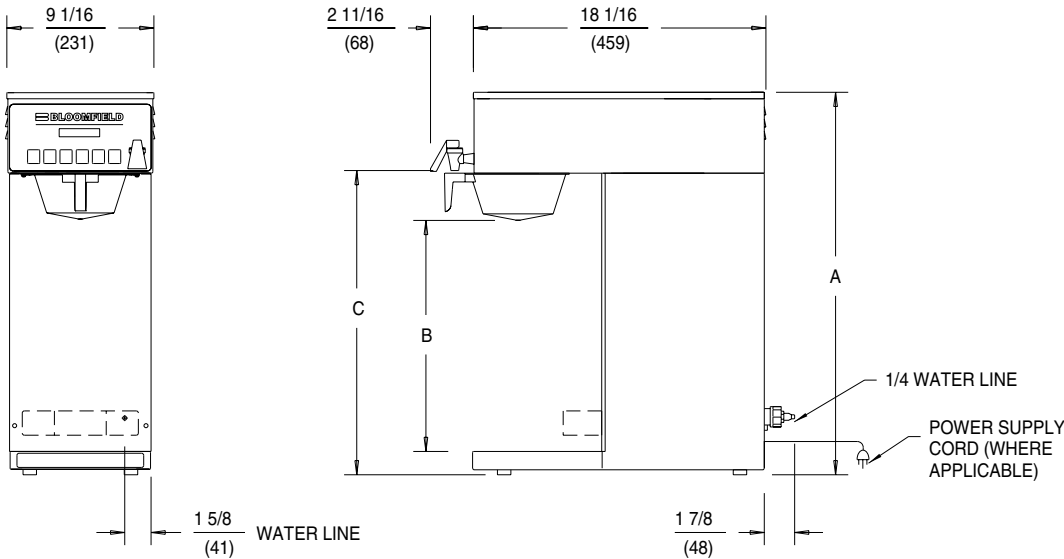

SPECIFICATIONS:

MODELS	WATTS	VOLTS	AMPS	PHASE	POWER SUPPLY CORD
2080/2082	1800	120	15.0	SINGLE	NEMA 5-15P
☛ 2080CA/2082CA	1500	120	12.5	SINGLE	NEMA 5-15P
* 2086/2088	3200	120/240 4 WIRE	13.5	SINGLE	NONE
☾ 2086EX/2088EX	3200	220-240	13.3	SINGLE	NONE

☛ Meets Canadian standards. ☾ Denotes CE approved models. ☾ Denotes export products. * Also meets Canadian standards.

NOTE: Specifications are subject to change without notice and are not intended for installation purposes. See operation and maintenance manual for complete instructions.

ACCESSORIES: See the Bloomfield Brew product catalog for a complete listing of brewers and accessories.



Complete line of Airpots
for use with brewers with 13 3/8" clearance heights

2.5 Liter Thermal Servers
for use with brewers with 17 1/2" clearance heights

1.9 Liter Hand Held Pours
for use with brewers with 9 1/2" clearance heights

BLOOMFIELD INDUSTRIES
2 ERIK CIRCLE, PO BOX 280, VERDI, NV 89439 U.S.A.
(888) 356-5362 • FAX (800) 356-5142 • www.wellsbloomfield.com
Export: (775) 345-0444 • FAX (775) 345-8232
5850 KEATON CRESCENT, MISSISSAUGA, ONTARIO L5R 3K2 CANADA
(905) 507-1700 • FAX (905) 507-1777 • www.bloomcan.com
©2001 BLOOMFIELD INDUSTRIES • PRINTED IN THE U.S.A.
06/01 • REV (-) • PART NO. 75324



BLOOMFIELD

Coffee Time Services
Brian Mahoney

9 4 1 - 2 3 2 - 3 7 1 0